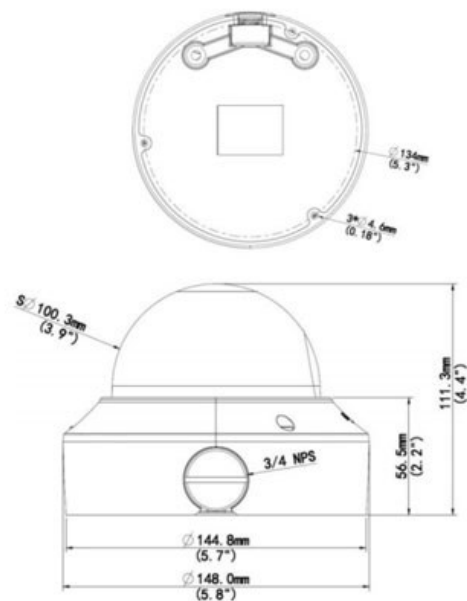


CP-VNC-V41ZR3-MD**4MP Full HD WDR Array Vandal Dome Camera - 30Mtr.****INDIGO****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max: 20fps@4MP
- Ultra H.265, H.265, H.264, MJPEG Triple-stream encoding
- Support WDR, Day/Night (ICR), 2D/3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
- 2.8~12 mm Motorized Lens
- IR Range of 30 Mtrs, Micro SD Card, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**Instastream****CE FC****RoHS**
COMPLIANT

CP- VNC-V41ZR3-MD

4MP Full HD WDR Array Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Angle of View
Video Compression
Back Light Compensation
Video Streaming
Frame Rate
Motion detection
Privacy Mask
ICR
ROI
WDR
Protocol
Ethernet
OSD
IR
Micro SD
Special Features
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 4MP Progressive scan CMOS
Colour: 0.01Lux (F1.6, AGC ON) 0 Lux with IR
Auto/Manual, 1~1/100000 s
Auto/Manual
2.8~12 mm Motorized Lens
Auto/Manual
91.0°~27°(H), 54.4°~13.7°(V), 118.3°~33.2° (O)
Ultra H.265, H.265, H.264, MJPEG
BLC/ HLC
Triple
Main Stream: 4MP (2592x1520): Max. 20fps; Sub Stream: 720P (1280x720): Max.20 fps; Third Stream: D1 (704x576): Max.20fps
Up to 4 areas
Up to 8 areas
IR-cut filter with auto switch (ICR)
Up to 2 areas
Support
IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, ONVIF (Profile S, Profile G, Profile T), API
1 RJ45 10M/100M Base-TX Ethernet
Up to 4 OSDs
Array Range of 30 Mtr.
Micro SD, Up to 256 GB
Digital De-Fog
-40°C ~ +60°C (-40°F ~ 140°F)
10%~ 95% RH (non-condensing)
DC12V±25%, PoE (IEEE802.3 af)
Max 6W
IP67 & IK10
Ø148 x 111.3 mm (Ø5.8" x 4.4")
0.92 Kg

