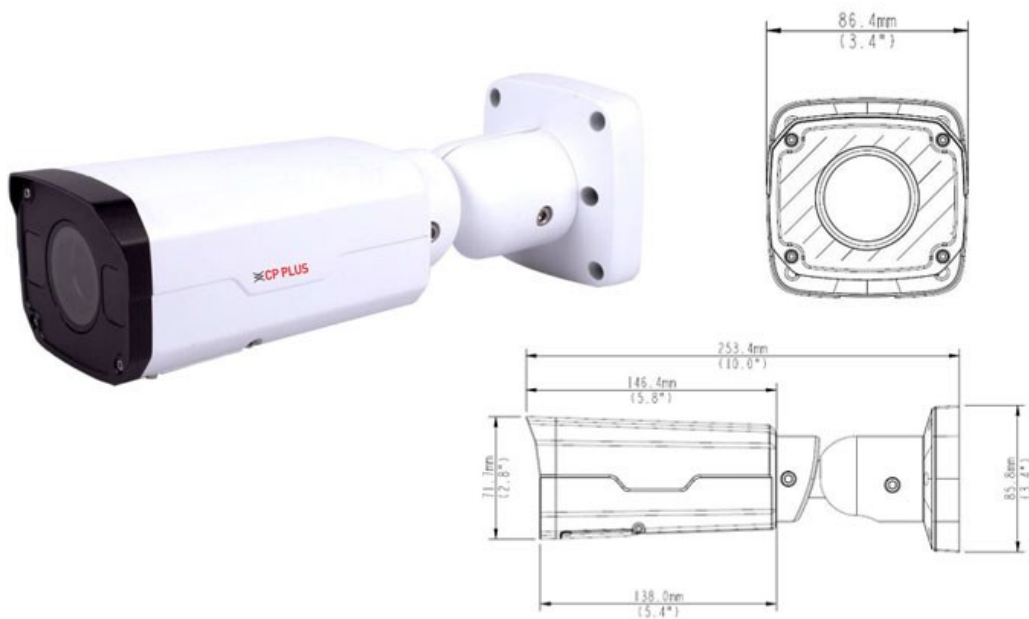


CP- VNC-T41ZR3-MD**4MP Full HD WDR Array Bullet Camera - 30Mtr.****INDIGO****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4MP
- Ultra H.265, H.265, H.264, MJPEG Triple-stream encoding
- Support WDR, Day/Night (ICR), 2D/3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized Lens
- IR Range of 30 Mtrs, Micro SD, IP67, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**Instastream****CE FC** **RoHS**
COMPLIANT

CP- VNC-T41ZR3-MD**4MP Full HD WDR Array Bullet Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Angle of View
S/N Ratio
Video Compression
Back Light Compensation
Video Streaming
Frame Rate
Motion detection
Privacy Mask
ICR
ROI
WDR
Protocol
Ethernet
OSD
IR
Micro SD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 4MP Progressive scan CMOS
Colour: 0.02 Lux (F1.6, AGC ON), 0 Lux with IR on
Auto/Manual, 1/6~1/100000 s
Auto/Manual
2.8~12mm Motorized Lens
Auto/Manual
91.0°~27°(H), 54.4°~13.7°(V), 118.3°~33.2°(O)
>52dB
Ultra H.265, H.265, H.264, MJPEG
BLC/ HLC
Triple
Main Stream: 4MP (2048x1520): Max. 20fps; Sub Stream: 720P (1280x720): Max. 30fps; Third Stream: D1 (704x576): Max. 30fps
Up to 4 areas
Up to 8 areas
IR-cut filter with auto switch (ICR)
Up to 2 areas
Support
IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, SNMP, ONVIF (Profile S, Profile G), API
1 RJ45 100M Base-TX Ethernet
Up to 4 OSDs
IR Range of 30 Mtr.
MicroSD, up to 128GB
-30°C ~ +60°C (-22°F ~ 140°F)
10%~90% RH (non-condensing)
12 V DC±25%, PoE (IEEE802.3 af)
Max 6.5W
IP67
253.4mm x 86mm x 71.7mm (9.98"×3.4"×2.8")
1kg

