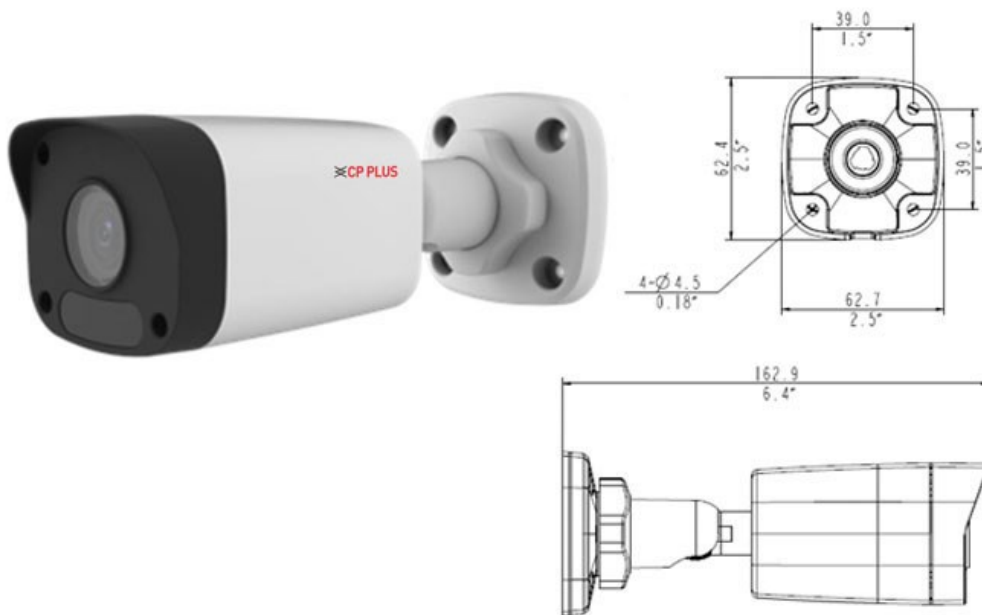


**CP- VNC-T21R3****2 MP Full HD Array Bullet Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- 1080P: Max. 25 fps , 720P: Max. 30 fps , D1: Max. 8 fps
- H.265, H.264, MJPEG Triple-stream Encoding
- DWDR, Day/Night (ICR), 2D/3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (6mm Optional)
- IR Range of 30 Mtrs, IP66, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream**

**CP- VNC-T21R3****2 MP Full HD Array Bullet Camera - 30Mtr.****Feature**

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control (AGC)  
Video Compression  
S/N Ratio  
Video Streaming  
Resolution  
Frame Rate  
Motion detection  
Privacy Mask  
ICR  
ROI  
WDR  
Protocol  
Ethernet  
IR  
OSD  
Operating Temperature  
Humidity  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

**Specification**

1/2.7" 2MP Progressive scan CMOS  
Colour: 0.02 Lux (F1.8, AGC ON) 0 Lux with IR on  
Auto/Manual, 1/6~1/100000 s  
Auto/Manual  
3.6mm Lens (6mm Optional)  
Auto/Manual  
H.265, H.264, MJPEG  
>52dB  
Triple  
1920x1080  
1080P (1920 x 1080): Max. 25 fps , 720P (1280 x 720): Max. 30 fps , D1 (720 x 576): Max. 8 fps  
Up to 2 areas  
Up to 8 areas  
IR-cut filter with auto switch (ICR)  
Supports  
DWDR  
L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, ONVIF, API  
1 RJ45 10M/100M Base-TX Ethernet  
IR Range of 30 Mtr.  
Up to 8 OSDs  
-35°C ~ +60°C (-31°F ~ 140°F)  
≤ 95% RH (non-condensing)  
12 V DC, or PoE (IEEE802.3 af)  
Max 5.0 W  
IP66  
162.9 x 62.4 x 62.7 mm (6.4" x 2.5" x 2.5")  
0.25 kg